


The operating status conditions of the printer and the amounts of inks used can be monitored remotely. PICT allows you to do other work during printing, helping you to perform operations in a planned manner.

You can also schedule maintenance and preparation for ink refilling in advance.

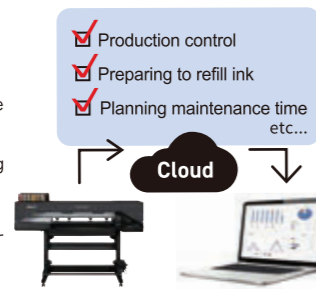

■ Software

Raster Link 7

- Combination of upgraded usability and functionality*
- Improves reproducibility of special effects (such as transparency) of PDF data
 - Increases RIP processing speed of PDF data by 25% on average
 - Prints out the variable data by Variable print function
 - Displays frequently used setting and pop-up windows

■ Specifications

	CJV200-160	CJV200-130	CJV200-75
Print head	On-demand piezo head		
Print resolution	Y:600, 900, 1200dpi X:600, 1200dpi		
Head gap	2levels by manual (1.5mm / 2.0mm)		
Ink	Type	SS21, SS22, BS4	
	Color	4color(C,M,Y,K) 8color(C,M,Y,K,Lc,Lm,Lk,Or)	
	Capacity	440ml	
Ink circulation	Yes		
Max.Load capacity	1620mm(63.8in)	1371mm(54in)	810mm(31.9in)
Max.Printable width	1610mm(63.4in)	1361mm(53.5in)	800mm(31.5in)
Media roll outer diameter	φ180mm or less (7.1in)		
Media roll weight	25kg (55.1 lb.) or less		
Media roll inside diameter	2 / 3 inch		
Cut function	Cut speed / acceleration	Speed:Max,300 mm/s Acceleration:Max, 0.5G	
	Cut pressure	10-450gf	
	Cutter response times	10 times / sec	
	Cut speed / acceleration	±0.2 mm (Excluding expansion and contraction of film due to temperature)	
Interface	Ethernet 1000 BASE-TT(Recommended) / USB 2.0 Hi-speed		
Power	AC(100-120V/200-240V±10%)×2 50/60Hz±1Hz		
Power consumption	Max.1320W x2 / 4.5W or less (Sleep mode)		
Operational environment	Temperature	20 - 30 degC (68-86 degF)	
	Humidity	35 - 65% Rh (Non condensing)	
	Guaranteed accuracy temperature	20 - 25 degC (68 - 77 degF)	
	Dust level	Equivalent to general office	
Dimensions (WxDxH)	2,770mm x 748mm x 1,370mm (109 x 29 x 54 in)	2,520mm x 748mm x 1,370mm (99 x 29 x 54 in)	1,960mm x 748mm x 1,370mm (77 x 29 x 54 in)
Weight	140kg (309lb)	130kg (287lb)	105kg (231lb)

■ Ink

Item	Color	Item No.	Remarks
BS4 600ml Ink Pack	Cyan	BS4-C-60	OPT-J0361 ECO CASE 4 is required for setup *2L ink pack is also available OPT-J0364 MBIS3 is required for setup
	Magenta	BS4-M-60	
	Yellow	BS4-Y-60	
	Black	BS4-K-60	
SS22 440ml Cartridge	Cyan	SS22-C-44	*1L ink pack is also available OPT-J0364 MBIS3 is required for setup
	Magenta	SS22-M-44	
	Yellow	SS22-Y-44	
	Black	SS22-K-44	
	Light Cyan	SS22-LC-44	
	Light Magenta	SS22-LM-44	
	Orange	SS22-OR-44	
	Light Black	SS22-LK-44	
SS21 440ml Cartridge <small>*Scheduled for support in March 2025</small>	Cyan	SPC-0501C	*2L ink pack is also available OPT-J0364 MBIS3 is required for setup
	Magenta	SPC-0501M	
	Yellow	SPC-0501Y	
	Black	SPC-0501K	
	Light Cyan	SPC-0501LC	
	Light Magenta	SPC-0501LM	
	Orange	SPC-0501Or	
	Light Black	SPC-0501Lk	

■ Options

Item No.	Item	Image
OPT-J0422	NCU OPT	
OPT-J0364	MBIS3 bulk supply unit	
OPT-J0576	MBIS BKT OPT	
OPT-J0502	Level foot OPT	
OPT-J0578	160 cover OPT	
OPT-J0579	130 cover OPT	
OPT-J0580	75 cover OPT	
OPT-J0361	ECO CASE4	

•Some examples shown in this catalog are artificial renderings. •Specifications, designs and dimensions shown in this catalog may be subject to change without notice for technical improvements. •The corporate and merchandise names in this catalog are the trademarks or registered trademarks of the respective corporations. •Inkjet printers use extremely fine dots, so colors may vary slightly after replacement of print heads. •Also note that when using multiple printer units, colors could vary slightly from one unit to another due to slight individual differences. •Please note that descriptions and data in this catalog are as of September 2024

M MAGENTISS

À LA RECHERCHE
D'UNE QUALITÉ D'IMAGE ÉLEVÉE
ET D'UNE FACILITÉ D'UTILISATION
POUR TOUS



CONTACTEZ-NOUS

magentiss@magentiss.fr
www.magentiss.fr
shop-magentiss.fr
+33(0)4 28 29 92 27



UNE BEAUTÉ BOULEVERSANTE

La CJV200 est équipée d'une seule tête d'impression « 330 Engine » dans l'imprimante phare de Mimaki.

La technologie de contrôle précis d'une goutte d'encre minimale de 3 pl et la tête d'impression qui offre des vitesses élevées, résultant en une impression incroyablement belle.



Practical **17.0 m²/h**



FACILE POUR TOUT LE MONDE

Conception simple

Tête d'impression unique Entretien simple

Le système à tête d'impression unique réduit le temps de nettoyage et le temps de réglage. La conception simple vous permet de travailler rapidement et facilement




Couvercle largement ouvert pour un accès facile

Panneau de commande orienté vers le haut pour une visualisation facile



Réduisez la consommation d'encre en seulement 2 clics Fonction d'économie d'encre

N'importe qui peut facilement réduire sa consommation d'encre sans expertise technique. Cette fonction est disponible avec tous les médias et profils.



Facile et précis CONFIGURATION AUTOMATIQUE

Effectue automatiquement les ajustements nécessaires lors de la configuration du support pour garantir une qualité d'image optimale à tout moment

(DAS | Dot Adjustment System)




Productivité fiable même pendant la haute saison

	4 Color	8 Color
High Quality 1200x1200 6pass	10.1 m ² /h (108.7 sqft/h)	5.0 m ² /h (53.8 sqft/h)
Quality 900x1200 6pass	12.5 m ² /h (134.5 sqft/h)	6.0 m ² /h (64.6 sqft/h)
Standard 600x1200 6pass	17.0 m ² /h (183.0 sqft/h)	8.5 m ² /h (91.5 sqft/h)
High Speed 600x1200 4pass	22.0 m ² /h (236.8 sqft/h)	11.0 m ² /h (118.4 sqft/h)

CJV200-160 print speed

Réglage sur 5 niveaux du niveau 1 au niveau 5

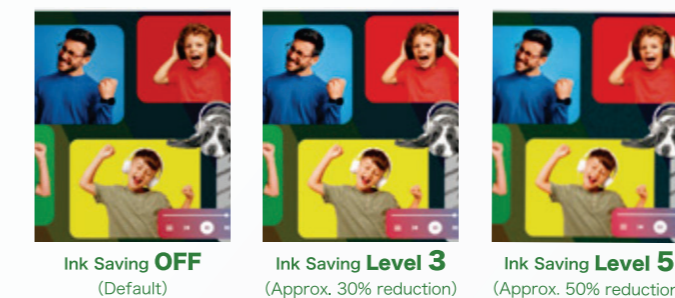

LOGICIEL DE CONCEPTION SIMPLE

Simple Create

SimpleCreate est un logiciel qui vous permet de créer des étiquettes, des POP, des autocollants et d'autres designs sans avoir besoin d'un logiciel de PAO. Il fournit des outils simples pour créer des dessins et des lignes de coupe, ainsi qu'une sortie directe à partir du logiciel.

